


DIMENSIONS TABLE

UNIT: mm

NOMINAL SIZE	d	d'	ANSI Class150						L	t	D2	l1	H	H1	H2	H3	A
			D	C	n	h	n1	M									
200 ^{mm} 8"	196	168	343	298.5	6	22	2	W ³ / ₄	292	29	310	175	577	143	240	337	310

NOTE. The shape and appearance of assembly differ a little with nominal size compared to this drawing.

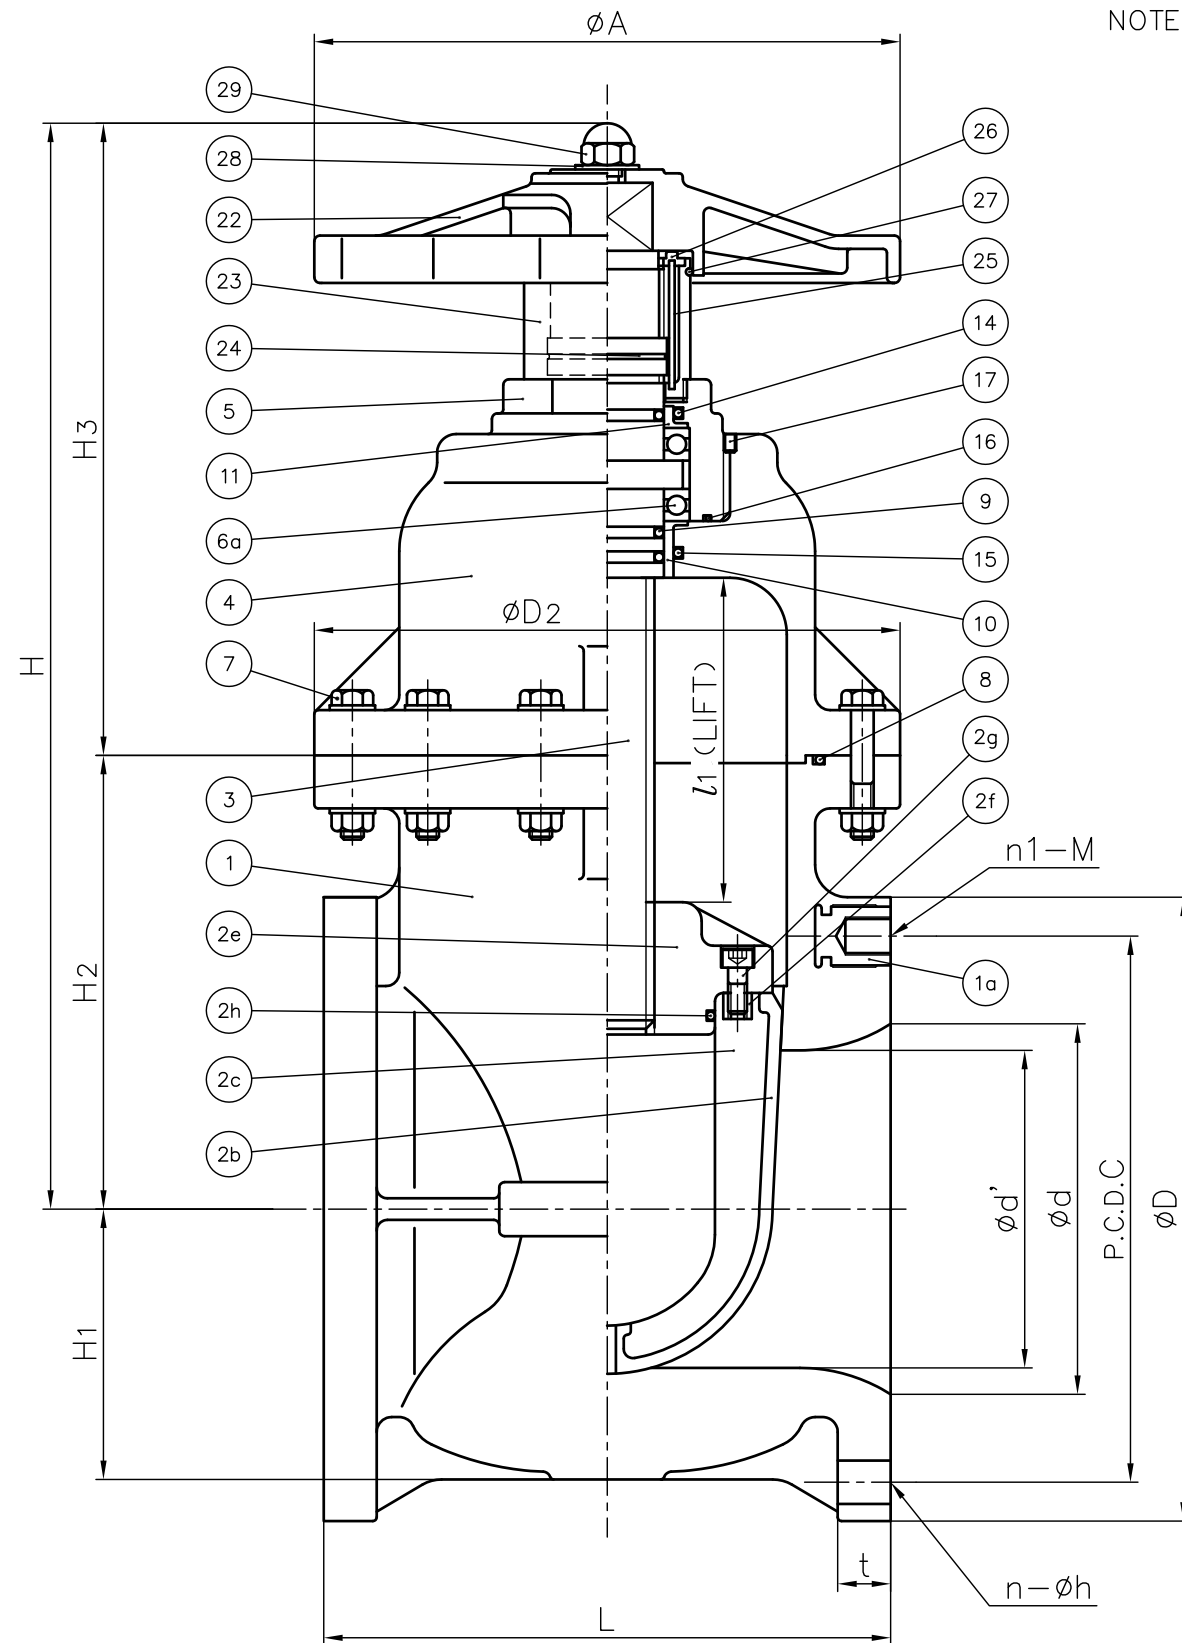

29	BOX NUT	1	STAINLESS STEEL (SUS304)	
28	WASHER	1	PVC	
27	O-RING (G)	1	EPDM	
26	GUIDE PIN HOLDER	1	PVC	
25	GUIDE PIN	1	STAINLESS STEEL (SUS304)	
24	INDICATING RING	1	PVC	
23	INDICATING COVER	1	PC	
22	HAND WHEEL	1	PP	
17	SET SCREW (A)	1	STAINLESS STEEL (SUS304)	
11	BUSHING (B)	1	PP	
10	BUSHING (A)	1	PP	
16	O-RING (D)	1	EPDM ¹⁾ NBR ²⁾	1) Used for SBR Seat 2) Used for NBR Seat
15	O-RING (F)	1		
14	O-RING (E)	1		
9	O-RING (C)	3		
8	O-RING (B)	1		
2h	O-RING (A)	1		
7	BOLT · NUT	12 Sets	STAINLESS STEEL (SUS304)	
6a	THRUST BEARING	1Set (2)	HIGH CARBON CHROMIUM BEARING STEELS (SUJ2)	
5	BONNET (B)	1	HI-PVC	
4	BONNET (A)	1	HI-PVC	
3	STEM	1	PVC	
2g	BOLT (A)	4	STAINLESS STEEL (SUS304)	
2f	INSERTED METAL OF GATE (B)	4	BRONZE CASTING (BC6)	
2e	GATE (B)	1	HI-PVC	
2c	GATE (A)	1	C-PVC	
2b	SEAT	1	□SBR □NBR	
1a	INSERTED METAL OF BODY	4	COPPER ALLOY (C3604)	
1	BODY	1	HI-PVC	
No.	DESCRIPTION	QTY.	MATERIAL	REMARKS

ITEM	GATE VALVE (TYPE S) ASS'Y SOFT SEAL TYPE : HAND WHEEL MODEL ANSI Class150 : FLANGED END 200 ^{mm} (8")		
DRAWN	K.Sakiyama	DATE	SCALE
CHECKED	H.Kawano	JAN.27.2015	~
APPROVED	K.Kamita	DRAWING No.	
SPECIAL ORDER No.		SG-60002AEm	
ASAHI YUKIZAI CORPORATION			